

# Block & Tackle

Klein's line of block and tackle is engineered for high-strength requirements.

F O R P R O F E S S I O N A L S . . . S I N C E 1 8 5 7 ®



Block & Tackle



# Block and Tackle

## Block and Tackle

- These are NOT occupational protective devices. NOT for human support.
- Light, galvanized-steel shell blocks are fitted with snubbing hooks to hold the load.
- Sheaves are strong, yet are lightweight aluminum alloy with all-bronze bushings.
- Available with standard snap hooks or guarded snap hooks (with snap hook nose lengthened to extend over the latch or keeper).
- Choice of forged hook Cat. No. 258 or swivel hook Cat. No. 259.
- Hooks fit under insulator and engage pin on cross arm.
- All Klein block and tackle use high-quality, 3/8" diameter rope.
- Catalog numbers followed by S/R have rope spliced to block.
- Maximum safe load is 750 lbs. (338 kg).



1802-30 S/R

Cat. No.	Description	Weight (lbs.)
1802-30	Blocks with standard snap hooks. Furnished with 25' (7.6 m) of 3/8" (10 mm) rope. Has Cat. No. 267 block with snap hook and a detachable forged anchor hook (Cat. No. 258) on one end, and block Cat. No. 268 with eye and rope tie-off hook on other end.	2.80
1802-30 S/R	same as Cat. No. 1802-30, but with rope spliced to Cat. No. 268 block	2.80
1802-30S	same as Cat. No. 1802-30, except supplied with a detachable swivel anchor hook (Cat. No. 259) instead of hook Cat. No. 258	2.85
1802-30S S/R	same as Cat. No. 1802-30S, but with rope spliced to Cat. No. 268 block	2.85
H1802-30	Blocks with guarded snap hooks. Furnished with 25' (7.6 m) of 3/8" (10 mm) rope. Has Cat. No. H267 block with guarded snap hook and a detachable forged anchor hook (Cat. No. 258) on one end and block Cat. No. H268 (with guarded snap hook, eye and rope tie-off hook) on other end.	2.90
H1802-30 S/R	same as Cat. No. H1802-30, but with rope spliced to Cat. No. H268 block	2.90
H1802-30S	same as Cat. No. H1802-30, except supplied with a detachable swivel anchor hook (Cat. No. 259) instead of hook Cat. No. 258	3.00
H1802-30S S/R	same as Cat. No. H1802-30S, but with rope spliced to Cat. No. H268 block	3.00

## Anchor Hook

- Forged hook is designed to slip under insulator and engage pin of cross arm.
- Maximum safe load 750 lbs. (340 kg).
- Standard on Klein block & tackle Cat. Nos. 1802-30 and H1802-30.

Cat. No.	Eye I.D.	Throat Opening	Overall Length	Weight (lbs.)
258	5/8" (16 mm)	1-7/8" (48 mm)	5-1/2" (140 mm)	.42



258

## Swivel Anchor Hook

- Swivel clevis on this forged hook will engage with snap on Klein block & tackle Cat. Nos. 1802-30 and H1802-30.
- Swivel prevents twisting and kinking of rope.
- Maximum safe load 750 lbs. (340 kg).

Cat. No.	Swivel Opening	Throat Opening	Overall Length	Weight (lbs.)
259	1-3/16" x 1" (30 mm x 25 mm)	1-7/8" (48 mm)	6-1/2" (165 mm)	.40



259


All dimensions are in inches and (millimeters).

**WARNING:** These are NOT occupational protective devices. Do NOT use for human support.




## Heavy-Duty Snap Hook

- Snaps on with one hand.
- Forged hook may be used on many conventional steel blocks, 4" (102 mm) or smaller.
- Maximum safe load 8000 lbs. (3629 kg).



Cat. No.	Eye I.D.	Throat Opening	Overall Length	Weight (lbs.)
455	15/16" (24 mm)	1" (25 mm)	5" (127 mm)	.84

## Blocks

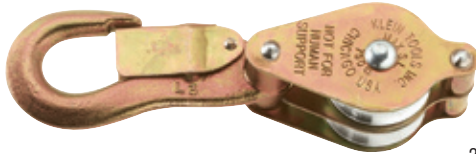

267



268



H267



H268

- Blocks without ropes and hooks.
- Made of light galvanized steel and aluminum alloy.
- Sheaves have bronze bushings.

Cat. No.	Description	Weight (lbs.)
267	plain block	.76
H267	same as Cat. No. 267, but nose extends over keeper	.80
268	same as Cat. No. 267, but with eye to splice line to block and rope tie-off	.91
H268	same as Cat. No. 268, but nose extends over keeper	1.00

## Polypropylene Hand-Lines with Snap Hook

- Made of 5/16" (8 mm) three-strand polypropylene rope spliced to eye of snap hook.
- Both lines 75' (23 m) long.
- Forged steel with swivel clevis and quick-acting plunger-style latch.



1804-60

Cat. No.	Description	Weight (lbs.)
1803-60	75' (23 m) of 5/16" (8 mm) rope with Cat. No. 443A snap. Maximum safe load 250 lbs. (113 kg)	2.45
1804-60	75' (23 m) of 5/16" (8 mm) rope with Cat. No. 470 swivel snap. Maximum safe load 250 lbs. (113 kg)	2.20

## Swivel Hook with Plunger Latch

- Forged steel with swivel clevis and quick-acting plunger-style latch.
- Designed to take 1/2" (13 mm) or lighter hand lines.
- Swivel action prevents accidental fouling into secondary wires.
- Maximum safe load 750 lbs. (338 kg).



470

Cat. No.	Swivel Opening	Throat Opening	Overall Length	Weight (lbs.)
470	1-3/16" x 1" (30 mm x 25 mm)	5/8" (16 mm)	5" (127 mm)	.30

All dimensions are in inches and (millimeters).

**WARNING:** These are NOT occupational protective devices. Do NOT use for human support.



# Block and Tackle

## Snap Hook

- General-purpose forged snap hook with eye at 90° to opening.
- Maximum safe load 1500 lbs. (675 kg).

Cat. No.	Eye I.D.	Throat Opening	Overall Length	Weight (lbs.)
443A	1" (25 mm)	1/2" (13 mm)	5-1/2" (140 mm)	.52



443A

## Howe Wire Tool

- Strap is made of tough nylon webbing.
- Swivel hook is forged steel with large opening.
- Shank of hook is lengthened to reach under insulator.
- Other end has device to hold the load at any distance.
- All metal parts are galvanized.
- Max. safe load 500 lbs. (225 kg).

Cat. No.	Description	Weight (lbs.)
1702-20N	nylon strap 1" (25 mm) wide, 7' (2.1 m) long	1.95



1702-20N

